




# CB3

47.2 x 39.4 x 29.1" / 161 gal

Art.-Nr.: 83281910

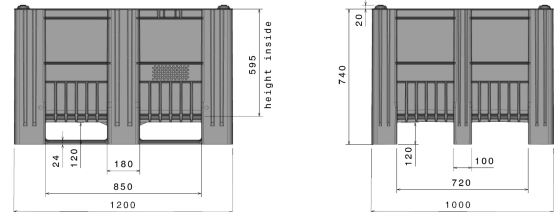

| Technical Data* <sup>1</sup>                                                                                                                                                                                                                                                             |                                                                                                                     |                                                                                                                        |                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| External Dimensions                                                                                                                                                                                                                                                                      | 47.2 x 39.4 x 29.1 " (1200 x 1000 x 740 mm)                                                                         | Internal Dimensions                                                                                                    | 44.5 x 36.4 x 23.4 " (1130 x 925 x 595 mm)                                                                          |
| Weight (lbs)                                                                                                                                                                                                                                                                             | 80.5 lbs                                                                                                            | Volume (l)                                                                                                             | 161.1 gal                                                                                                           |
| Material* <sup>2</sup>                                                                                                                                                                                                                                                                   | PE                                                                                                                  |                                                                                                                        |                                                                                                                     |
| Load capacity (lbs)                                                                                                                                                                                                                                                                      |  <b>Stacking Load</b><br>11050 lbs |  <b>Holding Capacity</b><br>1,550 lbs |  <b>Dynamic Load</b><br>2650 lbs |
| Characteristics                                                                                                                                                                                                                                                                          |                                                                                                                     | Options                                                                                                                |                                                                                                                     |
| Color: red<br>Manufactured in one piece<br>Runners: 3, unwelded<br>Stackable<br>Temperature stability: -22°F to +104°F, briefly up to +194°F<br>Resistant to most chemicals and cleaning agents<br>Food-safe. HACCP compliant<br>Container is based on DIN EN 13626 and DIN EN ISO 12048 |                                                                                                                     | Transponder (RFID)<br>Lid<br>Drain port                                                                                |                                                                                                                     |
| Loading quantities (Pcs / Approximate amount)                                                                                                                                                                                                                                            |                                                                                                                     |                                                                                                                        |                                                                                                                     |
|  <b>Container</b>                                                                                                                                                                                      | Container 20': <b>40</b><br>Container 40': -                                                                        | Container 40' High Cube: <b>106</b><br>Conventional trailer 45' high cube container: -                                 |                                                                                                                     |
|  <b>Truck</b>                                                                                                                                                                                          | MEGA-Trailer: <b>130</b>                                                                                            | Jumbo: <b>140-150</b>                                                                                                  |                                                                                                                     |
| Labelling                                                                                                                                                                                                                                                                                |                                                                                                                     |                                                                                                                        |                                                                                                                     |
| Customized printing and numbering available on request depending on quantity. Position upon consultation.                                                                                                                                                                                |                                                                                                                     |                                                                                                                        |                                                                                                                     |



- \*1 All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.
- \*2 Our service team is pleased to be at your disposal if you require exact information about material compositions.
- \*3 Stacking Load: With a maximum stacking height of 6 boxes (5 on 1 stacking) and evenly distributed load at approx. 68 °F.  
Dynamic Load: on a forklift with an evenly distributed load at a room temperature of approx. 68 °F.